


TLY

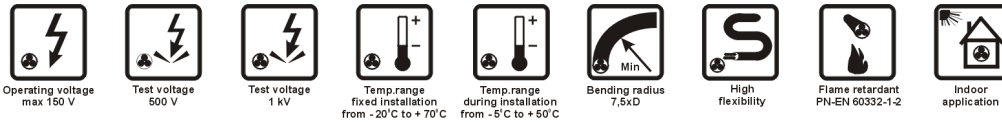

APPLICATIONS

TLY are telecommunication hook-up wires intended for use in remote control, signal and data transmission and industrial data processing systems and computer networks.

Generally, they are designed for control cabinets, electronic devices and others as interconnection cables for electronic modules, equipment and instruments.

CONSTRUCTION

- flexible, multiwire conductors, stranded of bare annealed copper wires (tin-plated on request),
- PVC insulation - identification colour code in accordance with PN-91/T-90206,
- in case of multiwire cables, insulated conductors twisted into pairs, triads or quads.

AVAILABLE UPON REQUEST

TLYc - wires with heat resistant PVC insulation up to 90°C (on request for temperature up to 105°C – TLYc 105°C).

TLYd - wires with reinforced (thickened) insulation.

CHARACTERISTICS

Conductor cross-section	mm ²	0.055	0.079	0.124	0.22	0.35	0.50
DC conductor resistance at 20°C, maximum	Ω/km	365.0	242.0	155.0	89.3	57.2	38.8
	single-wires	380.0	252.0	161.0	92.0	60.0	40.0
Insulation resistance, minimum	MΩ·km	50	50	50	200	200	200
Voltage test	V rms	500	500	500	1000	1000	1000

Operating voltage	150 V
Operating temperature range	
for fixed installation	from - 20 to + 70 °C
for movable installation	from - 5 to + 50 °C
Minimum bending radius	7.5 x cable diameter
Cable combustibility	flame retardant

Combustibility tests	PN-EN 60332-1-2, IEC 60332-1
Reference standards	PN-91/T-90200, PN-91/T-90206

The cable meets requirements of the low voltage direction 2014/35/EU



Product No.	Number of conductors x conductors cross-section	Cable outer diameter (appr.)	Copper index	Cable weight (appr.)
TLY				
0243 006	1 x 0,055	0.64	0.53	0.8
0243 024	1 x 0,079	0.75	0.76	1.2
0243 009	1 x 0,124	0.80	1.19	1.6
0243 011	1 x 0,22	1.0	2.11	2.6
0243 002	1 x 0,35	1.4	3.36	4.6
0243 005	1 x 0,50	1.5	4.8	6.2
0243 013	1 x 0,055c	0.64	0.53	0.8
0243 015	1 x 0,079c	0.75	0.76	1.2
0243 008	1 x 0,124c	0.80	1.19	1.6

Product No.	Number of conductors x conductors cross-section	Cable outer diameter (appr.)	Copper index	Cable weight (appr.)
0243 012	1 x 0,22c	1.0	2.11	2.6
0243 003	1 x 0,35c	1.4	3.36	4.6
0243 004	1 x 0,50c	1.5	4.8	6.2
TLYd				
0245 004	1 x 0,124	1.05	1.21	2.2
0245 005	1 x 0,22	1.22	2.08	3.2
0245 002	1 x 0,50	1.8	4.7	7.3
0245 003	1 x 0,124c	1.05	1.21	2.2
0245 001	1 x 0,22c	1.22	2.08	3.2

Other cross-sections available on request.

TECHNOKABEL SA reserves the right to change specifications without prior notice.